


## Interference Suppression Capacitor

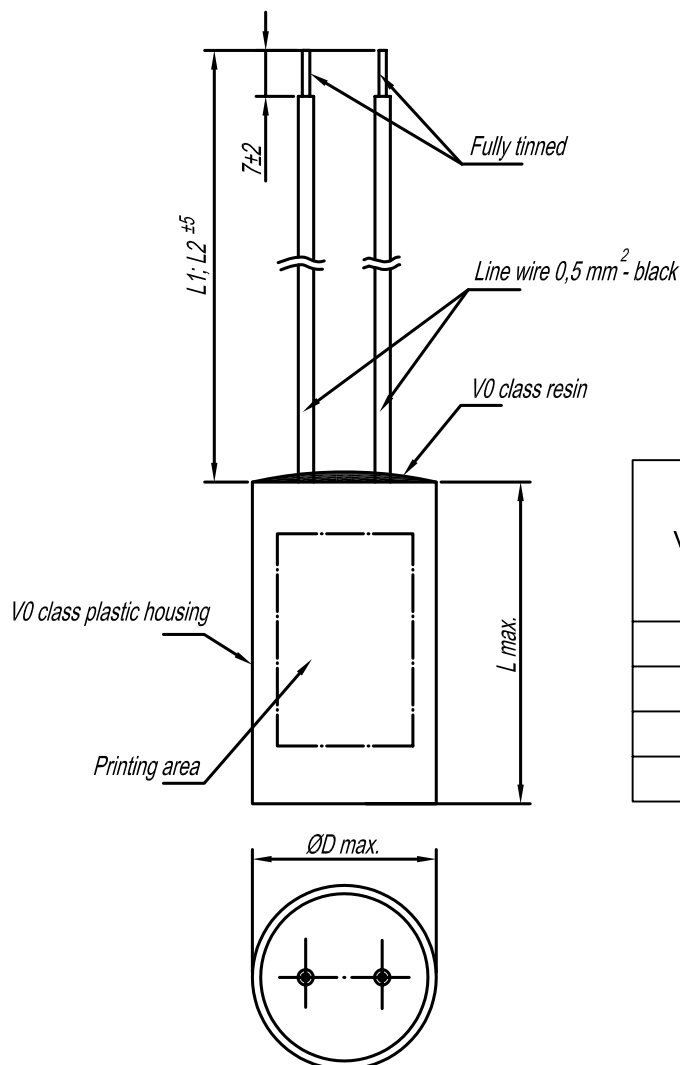

Example of printing

**MIFLEX**  
**KSPpzp-5**  
**0,1µF FM (X2)**  
**250VAC**  
**40/085/21C**  
**K3**

EN 60384-14

Ver.	Capacitance µF	Dimensions			
		D mm	L mm	L1 mm	L2 mm
A	0,15	16,5	42,0	80	80
B	0,07	14,5	42,0	140	160
D	0,07	14,5	42,0	80	80
K	0,1	15,5	37,0	100	100

TECHNICAL DATA	
Rated capacitance:	acc. to table
Capacitance tolerance:	±20%
Rated voltage:	250Vac
Rated frequency:	50±60Hz
Climatic category:	40/085/21C
Discharge resistor:	- -
100% Voltage test:	cl.X2 - 1625Vdc - 2s
Standards:	EN 60384-14

### Description:

KSPpzp type RFI capacitors are designed to suppress interferences in electronic devices with the rated voltage of 250VAC with rated frequency of 50±10Hz and the temperature range acc. to capacitor climatic category.

### Note:

This product fulfils the requirements of the RoHS Directive (2011/65/EC).



**MIFLEX SA**

ZAKŁADY PODZESPOŁÓW RADIOWYCH  
99-300 KUTNO, ul.GRUNWALDZKA 3  
Telefon: +48 24 355 11 00  
Fax: +48 24 355 11 88  
e-mail: miflexsa@miflex.com.pl

Index - IA05..

Revision date  
19.02.2018.

Page  
1/1