


## AC METALLIZED POLYPROPYLENE FILM CAPACITORS FOR MOTOR APPLICATIONS

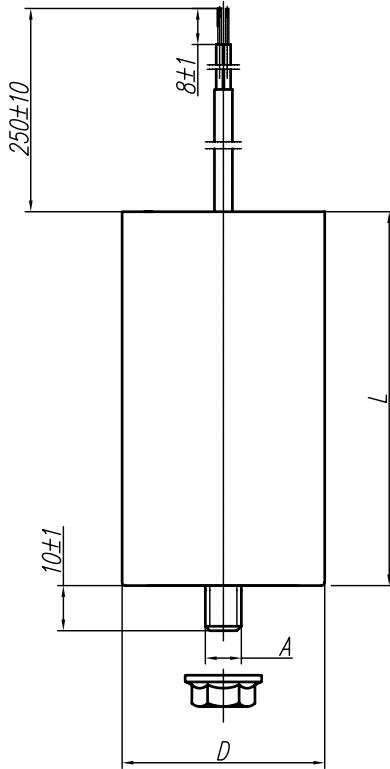

Rated capacitance $C_N$	Capacitance tolerance	Rated voltage, class	Dimensions		
			$D^{+1}$	$L^{+1}_{-1}$	A
$\mu\text{F}$	%	V~	mm	mm	mm
10	±5	425 V~, klasa A	40	75	M8
12			45	105	
30			60	110	M12
50					

### APPLICATION:

The MKSP-5AL capacitors are intended for use in AC circuits with the frequency of 50Hz. They are mostly used in single-phase electric motors as running capacitors. The capacitors have aluminum housing

The MKSP-5AL capacitors can be used in DC circuits with voltage not exceeding the following value:  $V_{dc} = \sqrt{2} * U_n$ .

### TECHNICAL DATA:

- Climatic category - 25/085/21,
- Dissipation factor: -  $\leq 0.003$  at  $f = 50\text{Hz}$
- Dielectric strength
  - between terminals: -  $2U_n / 50\text{Hz} - 60\text{s}$ ,
  - between terminals and case: -  $2500\text{V} / 50\text{Hz} - 60\text{s}$ ,
- Standards: - EN 60252-1, VDE 0560 part 8
- Output/terminals: - two-strand wire in insulation  $0,75\text{mm}^2$
- expected time of life: - class A - 30000h
- degree protection of enclosure: - S0

This product fulfills the requirements of the RoHS Directive (2011/65/UE).

### NOTE:

1. It may occur misalignment of terminals in relation to the capacitor axis.
2. It is available to implement another lengths of terminals after agreement.

 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH  
GRUNWALDZKA 3, 99-300 KUTNO, POLAND  
Telephone: +48 24 355 11 00  
Fax: +48 24 355 11 88  
e-mail: miflexsa@miflex.com.pl

Revision date  
10.03.2017

Page  
1/1