


## GTO capacitors for power electronics devices

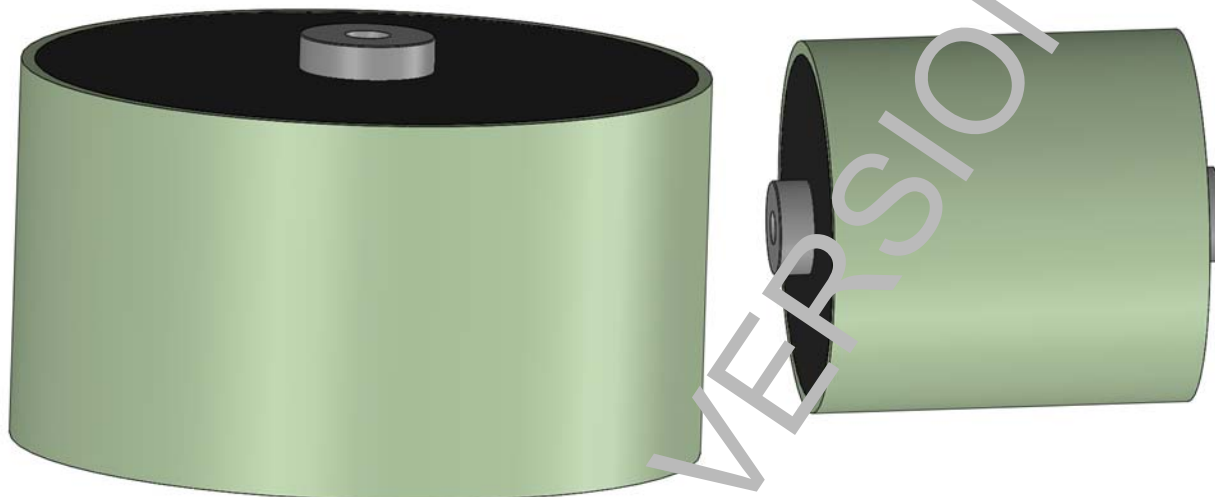

### General characteristics

MKPP-I37 capacitors are power electronics capacitors designed to protect semiconductor devices, in particular ordinary thyristors and GTO thyristors. They can be used in DC and AC circuits with values compliant with technical data. They meet the requirements of the EN 61071 standard concerning capacitors for power electronics devices.

The design of the capacitors minimizes the parasitic inductance, and the self-healing, metallized film system improves the safety and lifetime of capacitors.

The low inductance and series resistance of the capacitors allows their use in applications in which high current pulses will flow through the capacitors. Capacitors are made in an insulating casing, capacitor winding element is encapsulated with PUR resin.

### ATTENTION:

The capacitors are not equipped with a discharging device, the level of voltage and energy accumulated in capacitors is dangerous for health and human life. Be especially careful when installing, operating and servicing equipment containing these capacitors.

\*) - the dimensions and parameters of the capacitors may change

## GTO capacitors for power electronics devices

### Basic technical data

Capacitance range	2 ÷ 4 $\mu$ F - see tab. 1 other capacitances after individual agreement
Capacitance tolerance	J: $\pm$ 5%
Dielectric dissipation factor (tg $\delta_o$ )	0,0002
Expected lifetime	100 000h @ $\theta_{hs}$ +70°C do U <sub>NDC</sub>
Minimum operating temperature $\theta_{min}$	-40°C
Maximum operating temperature $\theta_{max}$	+85°C
Hottest ambient point $\theta_{hs}$	+85°C
Insulation resistance	Ri x C $\geq$ 30000s
IEC climatic category	40/085/56
Humidity class	maximum relative humidity: 75% on average per year, 95% 30 days a year, condensation is not allowed
Maximum operating altitude	2000m above sea level

### Type and parameters of tests

Electrical strength between terminals U <sub>TT</sub>	1,5U <sub>NDC</sub> , 10s
Electrical strength between terminals and casing U <sub>Tc</sub>	4000V <sub>AC</sub> , 60s
Endurance testing	according to EN 61071

### Construction data

Dielectric type	metallized polypropylene with self-healing properties
Filling	without PCB, solid PUR resin
Working position	any
Type of work	continuous
Cooling	natural or forced
Protection	no internal protection
Discharging device	none
Terminals type	axial, with internal thread M8
Tightening torques	8,5 Nm
Overload, maximum allowable voltage	1,10U <sub>NDC</sub> 30% of working time in one day 1,15U <sub>NDC</sub> 30 min /d 1,20U <sub>NDC</sub> 5 min /d 1,30U <sub>NDC</sub> 1 min /d 1,50U <sub>NDC</sub> 30ms not more than 1000 times during the life time

### Standards, directives, certificates

EN 61071 - Capacitors for power electronics
RoHS
REACH
UL 94

## GTO capacitors for power electronics devices

### Storage and use

It is suggested not to store capacitors for more than 5 years. After 1 year of storage, it is recommended to perform initial measurement of capacitance and  $\tan\delta$  factor before switching on the power supply.  
The polypropylene film capacitors do not require electrical formatting before use (as in the case of electrolytic capacitors).

Storage conditions to be met:

- relative humidity: on average 75% in a year
- maximum relative humidity: 95%, 30 days a year
- condensation: not allowed
- minimum storage temperature:  $-40\text{ }^{\circ}\text{C}$
- maximum storage temperature:  $+85\text{ }^{\circ}\text{C}$

Capacitors should be stored in closed rooms with no corrosive atmosphere (for example the presence of chlorides and gaseous sulphides, acids, alkaline substances, salts or equivalents are not permitted substances). Packed capacitors should be transported carefully, especially while using a forklift.

### Terms and definitions

- $U_{\text{NDC}}$  - Rated DC voltage for which the capacitor has been designed for continuous operation.
- $U_{\text{peak}}$  - The peak value of the highest working repetitive voltage of any polarity for which the capacitor is designed for continuous operation or the peak-to-peak voltage value if it changes polarity.
- $U_{\text{RMS}}$  - RMS effective voltage value on the capacitor.
- $U_{\text{s}}$  - Unique impact voltage. Peak value of voltage caused by switching operations or other disturbances in the system operation, with a duration shorter than the period of the basic course, the occurrence of which is allowed a limited number of times.
- $C_{\text{N}}$  - Rated capacity measured at  $20^{\circ}\text{C}\pm 5^{\circ}\text{C}$  at 1kHz frequency and 1V voltage.
- $I_{\text{max}}$  - Maximum effective value of the current during continuous operation.
- $\hat{I}$  - Maximum peak current. Maximum, repeatable peak current value that can occur during continuous operation.
- $\hat{I}_{\text{s}}$  - Maximum impact current. Peak value of current caused by switching operations or other disturbances in the work of the system, with a duration shorter than the period of the basic course, the occurrence of which is acceptable in a limited number of times.
- $R_{\text{s}}$  - Series resistance. Resistance of capacitor current paths under specific operating conditions.
- $L_{\text{s}}$  - Self-inductance. Sum of inductances of all internal capacitor elements.
- $R_{\text{th}}$  - Thermal resistance. Indicates how many degrees the temperature of the capacitor rises in the hottest point due to power losses.
- $\theta_{\text{amb}}$  - The temperature of the cooling air. The temperature of the cooling air measured in the hottest spot of a capacitor bank, in conditions set at half the distance between two capacitors, in the case of a single capacitor, this is the temperature measured at a point about 0.1 m away from the housing in 2/3 of the height of the capacitor, measured from the base.
- $\theta_{\text{min}}$  - The lowest operating temperature. The lowest temperature of the dielectric, at which voltage applied can be connected to the capacitor terminals.
- $\theta_{\text{max}}$  - Maximum working temperature. The highest temperature of housing at which the capacitor can work.

## GTO capacitors for power electronics devices

### Terms and definitions

$\theta_{hs}$  - The temperature of the hottest point inside the capacitor. The temperature  $\theta_{hs}$  can be estimated in accordance with the given formula. During operation, the temperature  $\theta_{hs}$  cannot be exceeded. At rated load and not exceeding this temperature, the expected lifetime will be consistent with the given value with the statistical failure rate of 300FIT.

$$\theta_{hs} = \theta_{amb} + I_{max}^2 \cdot R_{esr} \cdot R_{th}$$

$R_{esr}$  - The equivalent series resistance of the capacitor, which in series with the capacitor of the capacity equivalent to capacitance of the considered capacitor, will cause in it a loss of power equal to the active power released in the capacitor under specific operating conditions.

$P_{max}$  - Maximum power loss. Maximum power loss allowed at maximum temperature of the capacitor housing.

$$P_{max} = \frac{\theta_{hs} - \theta_{amb}}{R_{th}}$$

$U_{NDC} = 2000V / U_{peak} = 2400V / U_{rms} = 850V / U_s = 3500V$  1)

CN [μF]	I <sub>max</sub> [A]	$\hat{i}$ [kA]	$\hat{i}_s$ [kA] 1)	I <sup>2</sup> t [A <sup>2</sup> s]	R <sub>s</sub> [mΩ]	L <sub>s</sub> [nH]	R <sub>th</sub> [K/W]	D <sub>±2</sub> [mm]	LC <sub>±2</sub> [mm]	LT <sub>±1</sub> [mm]	m [kg]	Rys.	Index
2	41	1,9	5,75	23	1,24	≤ 15	6,1	70	52	62	0,4	1	I37JA520J-A1
3	62	2,78	8,33	50	0,83	≤ 15	3,9	82	52	62	0,5	1	I37JA530J-A1
3,5	72	3,33	10,0	70	0,71	≤ 15	3,4	87	52	62	0,55	1	I37JA535J-A1
4	80	3,54	10,62	85	0,62	≤ 15	3,1	92	52	62	0,6	1	I37JA540J-A1

1) - no more than 1000 times during the life time

Other capacitances and voltages are possible - according to individual arrangements

**MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH  
99-300 KUTNO, ul. GRUNWALDZKA 3

Telephone: +48 24 355 11 00

Fax: +48 24 355 11 88

e-mail: miflexsa@miflex.com.pl



Fundusze Europejskie  
Program Regionalny



Unia Europejska  
Europejskie Fundusze  
Strukturalne i Inwestycyjne



Revision date

07.08.2019

Edition 1

Page

4/5

## GTO capacitors for power electronics devices

Drawing 1

