



RFI UNIT WITH RESISTOR

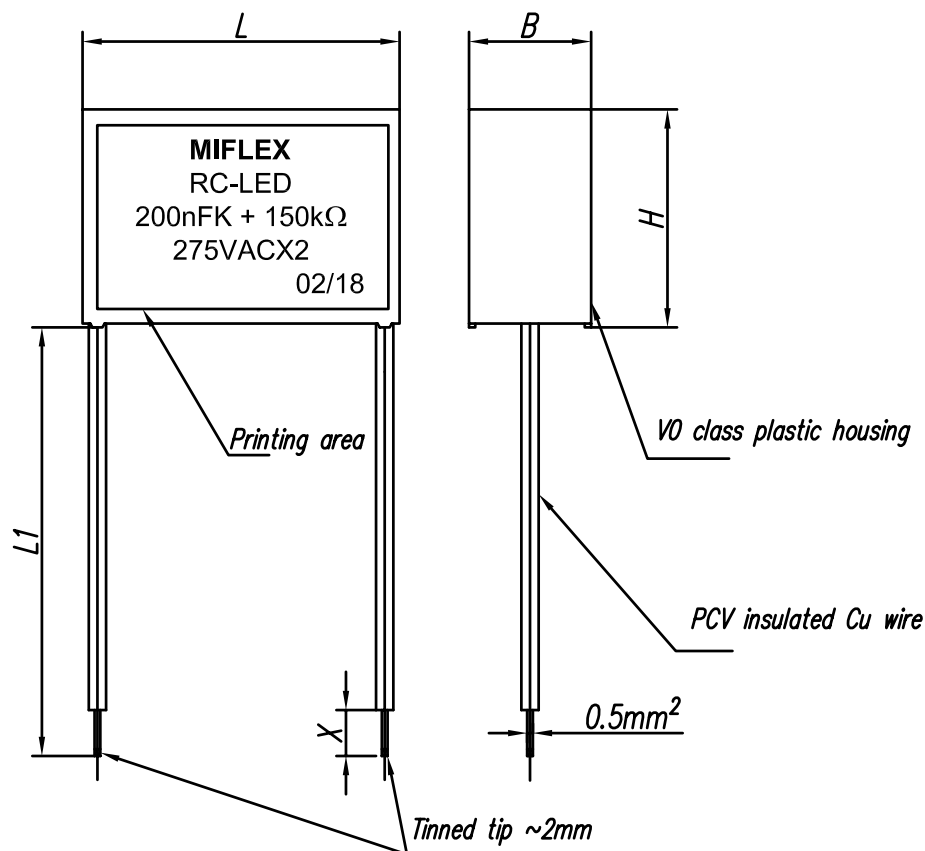

Electric schema



Example of printing

MIFLEX
RC-LED
200nFK + 150kΩ
275VACX2
02/18

Type	Capacitance	Resistance	Dimensions				
			B ±0,5	H ±0,5	L ±0,5	L1 ±5	X-2
	μF	kOhm	mm				
V02DU410KR412	0,1	120	8,5	17	18	80	12
V02EU420KR415	0,2	150	8,5	16,5	26,5	80	12

Description:

The RC-LED unit is intended for LED lighting circuits to improve the conditions of their operation.

This product fulfils the requirements of the RoHS Directive (2011/65/EC).

TECHNICAL DATA

Rated capacitance: acc. to table

Capacitance tolerance: ±10%

Rated voltage: 275Vac

Climatic category: 40/085/56C

Discharge resistor: acc. to table

Resistance tolerance: ±5%

100% Voltage test:
1700Vdc - 1s

Standards: EN 60384-14



ZAKŁADY PODZESPOŁÓW RADIOWYCH
99-300 KUTNO, ul. GRUNWALDZKA 3
Telefon: +48 24 355 11 00
Fax: +48 24 355 11 88
e-mail: miflexsa@miflex.com.pl

Index: V02...

Revision date
24.06.2020

Page
1/1